

Diffuser Specialist

P12 PRISMATIC

VANTEX™
AN ALP BRAND




Description

P12 The most widely used on the market today. Economical, many varieties and lighting uses. Available in acrylic and polycarbonate.

Prismatic sheets are available with a conductive grid which shields electromagnetic interference (EMI/RFI) and complies with the requirements of MIL-STD-461(E).

Please inquire on this option

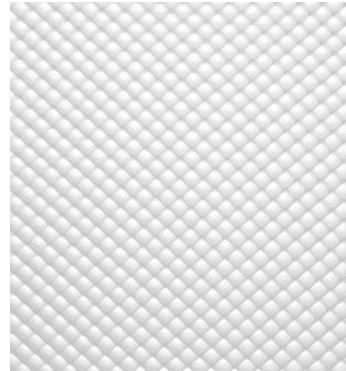

Pattern	Polymer	LT%	Thickness
P12AW	Acrylic	70%	.100
			.110
			.125
P12EW	Acrylic	72%	.100 .125
P12LW	Acrylic	72%	.100 .125
P12LW	Acrylic	78%	.100 .125
P12FC	Acrylic 25% Frost 50% Frost 100%Frost		.100

Ordering Information

Please call 1.800.880.5483 for price and delivery. Specify dimensions when placing an order.

Notice

Diffuser Specialist assumes no responsibility for suitability of luminaires and applications. The use of acrylic lenses near and above 80°C temperatures with high UV output light sources will cause degradation of the material.

Tolerance for Light Transmission is ±3%.

Subject to changes without notice.

Ready - To - Go

APR110AW 50100
P12 WHITE PRISM ACRYLIC
.110 THICKNESS
50" X 100"

APR125AW 5050
P12 WHITE PRISM ACRYLIC
.125 THICKNESS
50" X 50"

APR100EW 5050
P12 ENGINEERED WHITE
PRISM ACRYLIC
.100 THICKNESS
50" X 50"

APR125EW 5050
P12 ENGINEERED WHITE
PRISM ACRYLIC
.125 THICKNESS
50" X 50"

APR100LW 5050
P12 LUMIEO WHITE PRISM
ACRYLIC
.100 THICKNESS
50" X 50"

APR125LW 5050
P12 LUMIEO WHITE PRISM
ACRYLIC
.125THICKNESS
50" X 50"

APR100FC25 5050
P12 FROSTED CLEAR PRISM
Smooth/Frost
ACRYLIC
.100THICKNESS
50" X 50"

APR100FC50 5050
P12 FROSTED CLEAR PRISM
Smooth/Frost
ACRYLIC
.100THICKNESS
50" X 50"

APR100FC100 5050
P12 FROSTED CLEAR PRISM
Frost/Frost
ACRYLIC
.100THICKNESS
50" X 50"

