
Diffuser Specialist

Asymmetric Lenses Model T-10



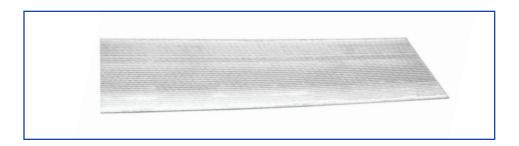

General Description

T-10 Lenses can assembled in recessed or surface mounted luminaires. The geometric designs of linear axis prisms control the source light to deliver an asymmetrical lighting distribution from 1 Lite and 4 Lite fixtures.

Application

T-10 Lenses are suitable for commercial, institutional, hospital, retail and residential lighting applications. A conductive grid which shields electromagnetic interference (EMI/RFI) and complies with the requirements of MIL-STD-461 (E) can be supplied on these Asymmetric T-10 lenses.

Typical beam distributions are found on the back page. The photometric data shows 29 footcandles are achieved from the 2377 candela directly below the four lamp fixture.

Ordering Information

Please call 1.800.880.5483 for price and delivery.

Specify lens size when placing an order. Custom widths and lengths are available. Typical lead time is four to six weeks.

Notice

Diffuser Specialist assumes no responsibility for suitability of luminaires and applications. The use of lenses near and above 70°C temperatures with high UV output light sources will cause degradation of the material.

Model T-10 1 Lite 4 Lite

Widths: 12" and 23-3/4"

Lengths: 47-3/4" and 48"

Lenses for commercial, institutional, hospital, retail and residential applications


Standard Material:Fluorescent grade acrylicrfi shielding available

Please inquire for further material options


Diffuser Specialist

Asymmetric Lenses Model T-10







Report No.: LL02527 Single 32 watt T8 Fluorescent 12 inch Asymmetric Lens in white painted troffer



Report No.: LL02504 Four 32 watt T8 fluorescent lamps 24 inch Asymmetric Lens in white painted troffer

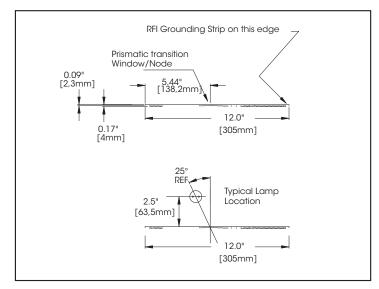

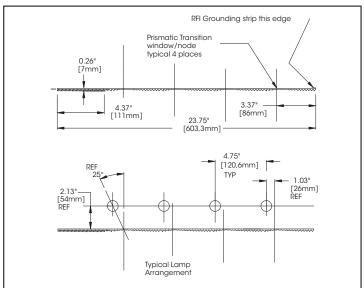

This drawing is for reference only. Actual part dimensions will vary. Customer is urged to review actual samples to confirm fit and function. All specifications and dimensions are subject to change without notice.