




DIFFUSER SPECIALIST

OUTDOOR FIXTURES: GLASS CHIMNEY COLLECTION | FI209



SPECIFICATIONS:

- 120V INPUT VOLTAGE, 50/60Hz
- HIGH POWER FACTOR
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +50°C (122°F)
- ESTIMATED 50,000 HRS L70*
- 5 YEAR WARRANTY
- DIMMABLE
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT RESINS
- ACRYLIC DIFFUSER
- FITS MOST 3 INCH DIAMETER POSTS (not included)
- UL LISTED FOR WET LOCATIONS
- STANDARD PACK QTY: 1

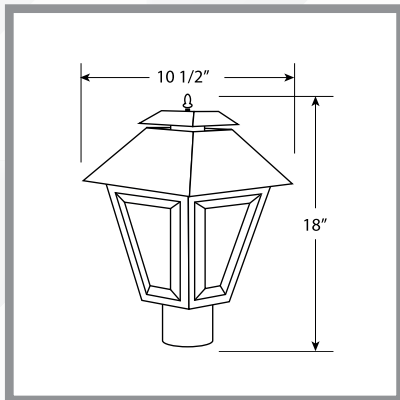

EXAMPLE # FI209-LE1200C-BF

STYLE #:

FI209 = 10.5"

SOURCE / WATTAGE:

LE800 = 13W POWER INPUT

CRI = 80 (TYP)

>65 LUMENS PER WATT

LE1200 = 14W POWER INPUT

CRI = 80 (TYP)

>80 LUMENS PER WATT

LE1800 = 23W POWER INPUT

CRI = 80 (TYP)

>80 LUMENS PER WATT

LUMENS / CCT

LE800 W = 900 LM 3000K

LE800 C = 1000 LM 4000K

LE1200 W = 1350 LM 3000K

LE1200 C = 1400 LM 4000K

LE1800 W = 1850 LM 3000K

LE1800 C = 1900 LM 4000K

BODY

B = BLACK | W = WHITE

LENS

C = CLEAR | F = FROSTED

OPTIONS

G = GLASS CHIMNEY FROSTED

T = BRASS TRIM



San Antonio | 210.340.1400 | 1102 W. Laurel, Ste. 5 | San Antonio, TX 78201

Houston | 713.682.4555 | 10612 Hempstead Hwy, Ste. D | Houston, TX 77092

Email: customerservice@diffuserspecialist.com